


ASSEMBLY INSTRUCTIONS

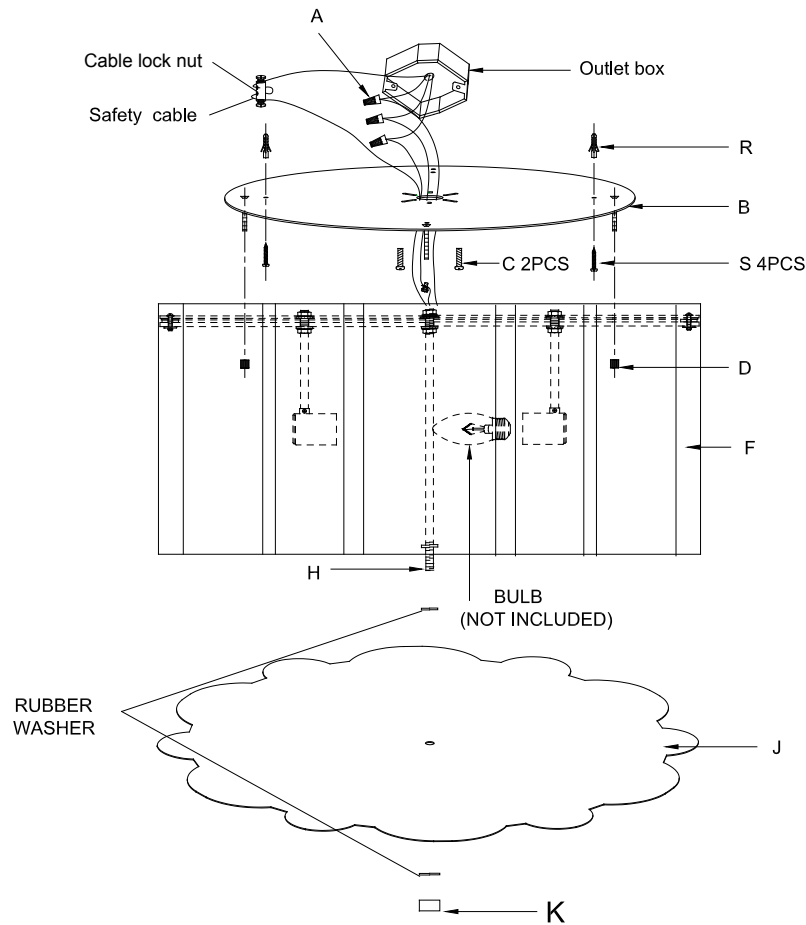

Markos Flush Mount

Item # AH4021

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully remove the mounting plate (B) from the fixture base (F) by unscrewing the screws (D).
2. Install plastic anchors (R) provided into the ceiling.
3. Use the mounting screws (C) & (S) to secure the mounting plate (B) to the outlet box on the ceiling.
4. Connect the hot wire from the fixture (BLACK) to the hot wire from ceiling outlet box (usually BLACK). Fasten together with a plastic wire connector (A) provided and wrap connection with electrical tape.
5. Repeat this procedure for the WHITE neutral wire from the light fixture to the wire from ceiling outlet box (usually WHITE).
6. Connect ground wire from the light fixture (GREEN or bare copper) to ground wire from ceiling outlet box (usually green or copper in color).
7. Attach fixture base (F) to affixed mounting plate (B), letting rods on mounting plate (B) pass through the holes on fixture base (F), and secure with 4pcs ball nuts (D).
8. Insert light bulbs (not included) into sockets.
9. Attach acrylic diffuser (J) to fixture base (F), letting rod (H) pass through the center hole of acrylic diffuser (J) and secure with nut (K).
10. Restore power to outlet box and test fixture.
11. Installation is complete.

