


## ASSEMBLY INSTRUCTIONS

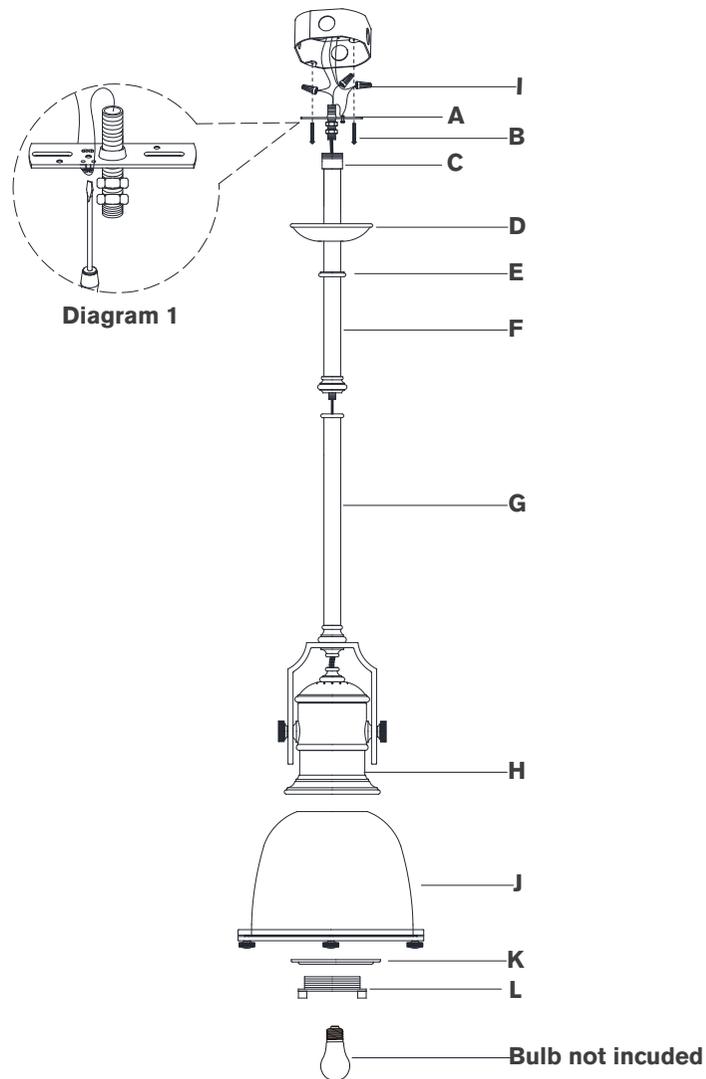

## Country Industrial Small Pendant

Item # CHC5133

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver      Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Thread top rod (**F**) to bottom fixture rod (**G**) by rotating clockwise.
3. Holding fixture upright, slide collar ring (**E**) and canopy (**D**) down and rest on coupling.  
**NOTE:** Slide components down slowly to avoid damages.
4. Assemble mounting bracket (**A**) to collar (**C**) securing with locknut provided.
5. Install assembled fixture to junction box by securing mounting plate (**A**) with mounting screws (**B**).
6. Cut excess wires, being sure to leave enough to reach the junction box.
7. Separate two sides of molded wire, and strip insulation on each 5/8".
8. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**I**).  
**NOTE:** It is imperative that the fixture is grounded.
9. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (**I**).
10. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (**I**).

**CAUTION:** Do not reverse the hot and neutral connections.

## ASSEMBLY INSTRUCTIONS

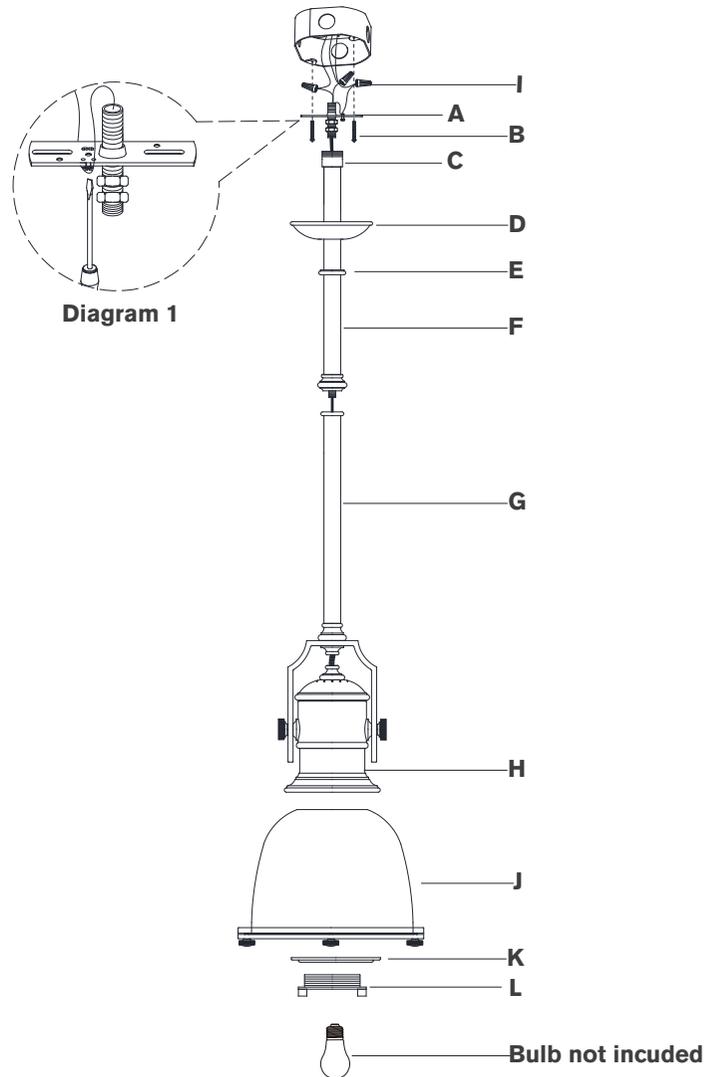

## Country Industrial Small Pendant

Item # CHC5133

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Make sure all wire connections are tight, then carefully tuck into the junction box
12. Install canopy (D) to mounting plate (A) and secure with collar ring (E).
13. Remove shade ring (L) and washer (K) from shade holder (H), then install shade (J) to shade holder (H) and secure with washer (K) and shade ring (L).
14. Install light bulb into the socket.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.