
ASSEMBLY INSTRUCTIONS

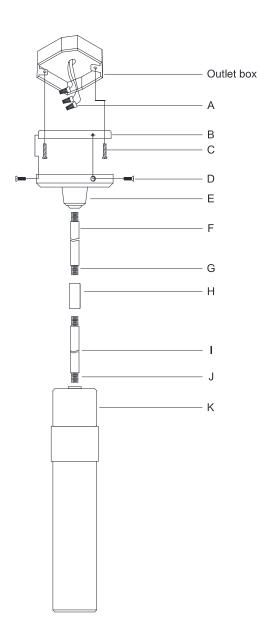

RALPH LAUREN

Barton Mini Single Pendant

Item # RL 5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Carefully remove all parts from the box.
- 2. Thread the threaded nipple (J) to the top of the fixture body (K), then let the tube (I) pass through the threaded nipple (J) and secure with connector (H).
- 3. Thread the threaded nipple (G) to the connector (H), then let tube (F) pass through the threaded nipple (G) and secure with canopy (E).
- 4. Remove the mounting plate (B) from the canopy (E) by loosening side screws (D).
- 5. Affix mounting plate (B) onto the outlet box and secure with mounting screws (C).
- 6. Measure the wires and cut. Be certain to leave enough to connect inside of the canopy.
- 7. Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 8. Connect the fixture Neutral wire (ribbed, no markings) with the neutral wire from the outlet box using wire nut (A).
- Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet box using wire nut (A).
 DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 10. Tuck these wire connections neatly into the outlet box to secure.










ASSEMBLY INSTRUCTIONS

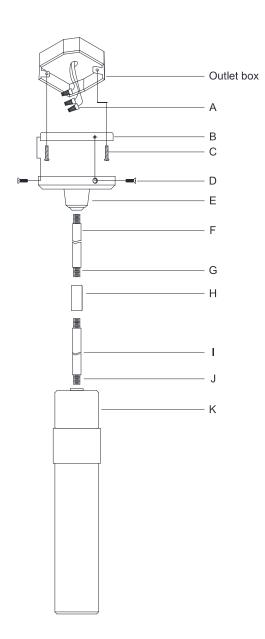

RALPH LAUREN

Barton Mini Single Pendant

Item # RL 5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 11. Attach the canopy (E) to the mounting plate (B) and secure with side screws (D).
- 12. Installation is complete, turn on power at fuse or circuit breaker.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.







