


ASSEMBLY INSTRUCTIONS

Halo Large Flush Mount

Item # BBL4096

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

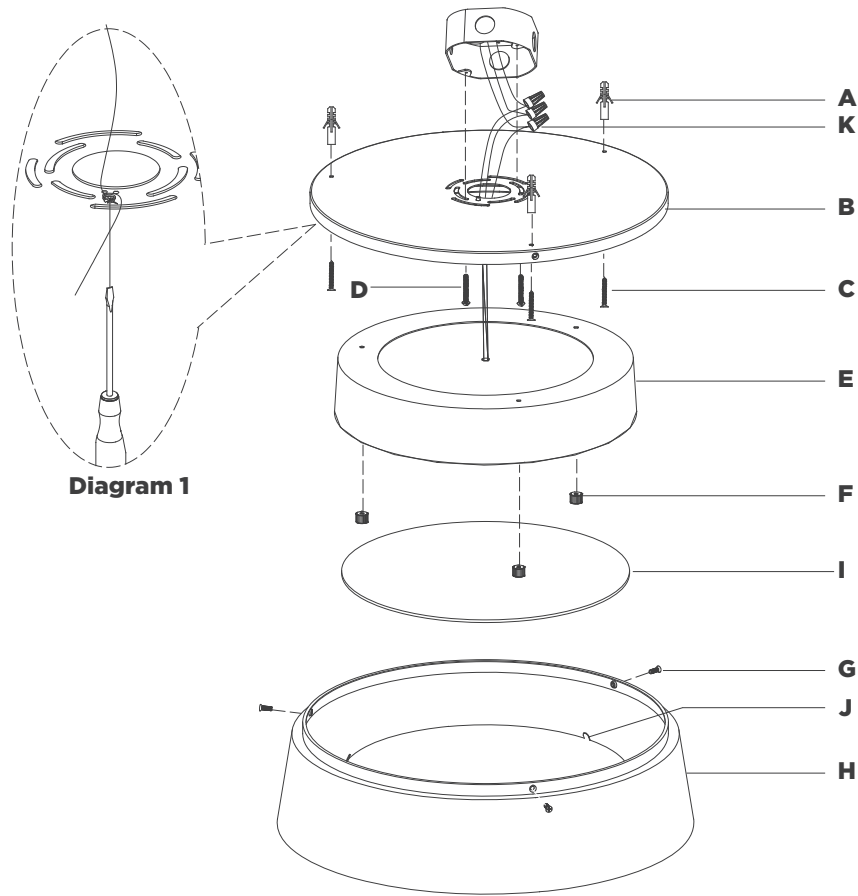

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Drill	Pencil	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove shade **(H)** from mounting plate **(B)** by removing screws **(G)**.
3. Remove fixture **(E)** from mounting plate **(B)** by removing thumbscrews **(F)**.
4. Using the mounting plate **(B)** as a guide, line up with the junction box and mark anchor positions.
5. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(A)** into the holes using a hammer.
6. Install mounting plate **(B)** to junction box and secure with mounting screws **(D)**, then secure wood screws **(C)** to anchors **(A)**.
7. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(K)**.

NOTE: It is imperative that the fixture is grounded.


ASSEMBLY INSTRUCTIONS

Halo Large Flush Mount

Item # BBL4096

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

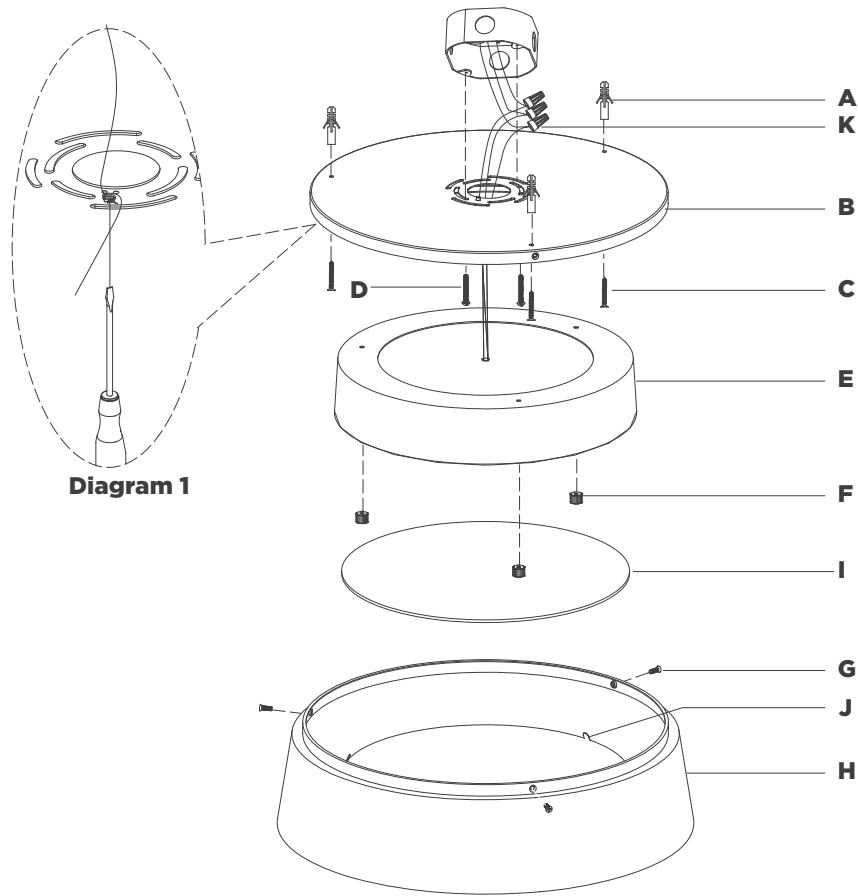

8. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(K)**.
9. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(K)**.

CAUTION: Do not reverse the hot and neutral connections.

10. Install fixture **(E)** to mounting plate **(B)** and secure with thumbscrews **(F)**.
11. Install diffuser **(I)** to the bottom of shade **(H)** and secure by bending metal tabs **(J)**.
12. Install shade **(H)** to mounting plate **(B)** and secure with screws **(G)**.
13. Installation is complete.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.