


ASSEMBLY INSTRUCTIONS

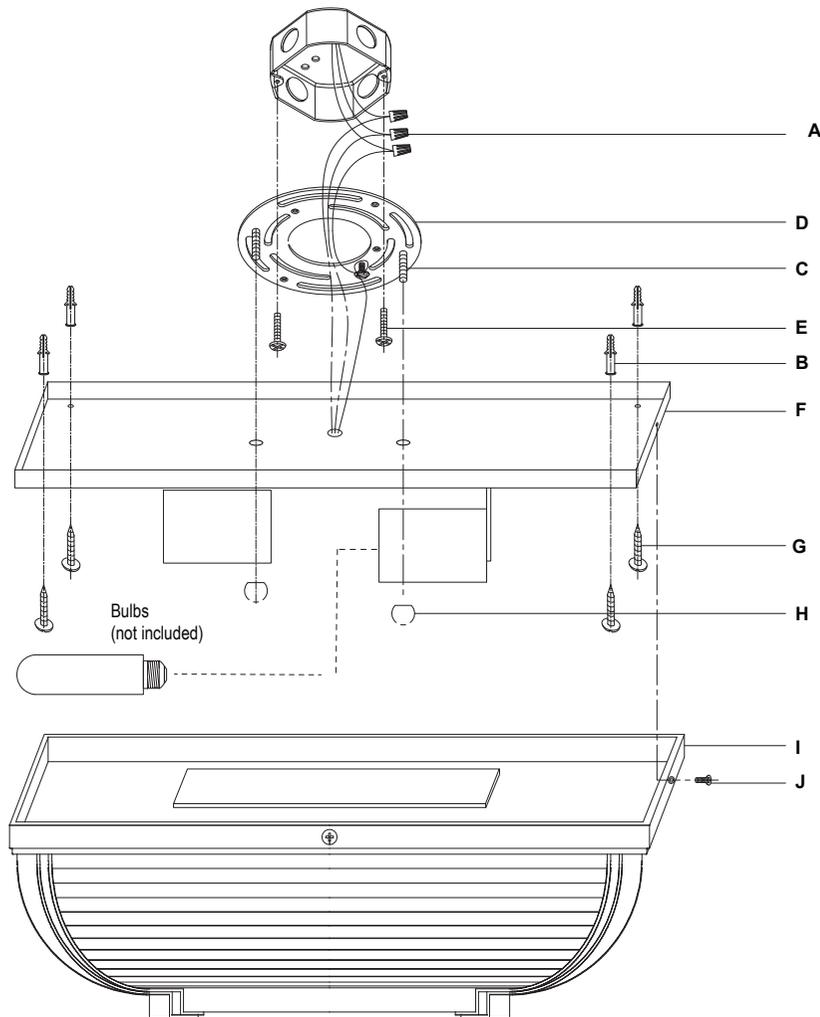

Perry Large Flush Mount

Item # RL 4072

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (D) from the fixture body (F) by loosening the ball nuts (H).
3. Put the fixture body (F) on the ceiling and mark the anchor holes position with pencil (not included).
4. Drill holes on the ceiling and knock the anchors (B) into the holes.
5. Install the mounting plate (D) to the junction box and secure with the mounting screws (E).
6. Wrap the fixture ground wire to the green ground screw on the mounting plate (D) and secure, then connect to the ground wire in the junction box using the wire nut (A).
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
7. Connect the fixture white wire to the neutral wire in the junction box using the wire nut (A).
8. Connect the fixture black wire to the hot wire in the junction box using the wire nut (A).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
9. Install the fixture body (F) to the mounting plate (D) and secure with the ball nut (H), then secure the wood screws (G) to the anchors (E) and lock tight.
10. Insert bulbs (not included) into the sockets.
11. Install the fixture shade (I) to the fixture body (F) and secure with the with side screws (J).
12. Installation is complete, turn on power at fuse or circuit breaker.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN

